

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

December 30, 2013

WELL WORK PERMIT

Horizontal 6A Well

This permit, API Well Number: 47-1706421, issued to ANTERO RESOURCES CORPORATION, is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: HONEY UNIT 2H

Farm Name: DUFFLEMEYER, MICHAEL B., . I

API Well Number: 47-1706421

Permit Type: Horizontal 6A Well

Date Issued: 12/30/2013

Promoting a healthy environment.

API Number: 17-06421

PERMIT CONDITIONS

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. Failure to adhere to the specified permit conditions may result in enforcement action.

CONDITIONS

- This proposed activity may require permit coverage from the United States Army Corps of Engineers (USACOE). Through this permit, you are hereby being advised to consult with USACOE regarding this proposed activity.
- 2. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 3. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the moisture content of the fill material shall be within limits as determined by the Standard Proctor Density test of the actual soils used in specific engineered fill, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort, to achieve 95 % compaction of the optimum density. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 5. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled Water Well Regulations, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 7. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.
- During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.

WW-6B (9/13)

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

41 PW 17 G	. Antoro	Panalinas Car	noretion	404499EE7	047 Doddaid	Mary Malle	Now Miller
1) Well Opera	tor: Antero	Resources Cor	poration	494488557 Operator ID	O17-Doddridg	1	New Milton Quadrangle
1012		Hanne Mark	011	-	County	District	Guantangie
2) Operator's	Well Number	Honey Unit	2H	Well P	ad Name: Sna	ke Run Pad	
3) Farm Name	/Surface Ow	ner: Michael D	oufflemeye	er et al Public Ro	oad Access: C	R 25	
4) Elevation, o	current groun	d: ~1113'	Ele	evation, proposed	d post-construc	tion: 1081'	
5) Well Type	(a) Gas	-	Oil	Une	derground Stor	age	
	Other						
	(b)If Gas	Shallow	a	Deep			Dev 12:31
		Horizontal	2				12-31
6) Existing Page	d: Yes or No	No					12/20
7) Proposed Ta	arget Formati	on(s), Depth(s	s), Antici	pated Thickness	and Associate	d Pressure(s)	:
Marcellus Sh	nale: 7400' TV	D, Anticipated 1	hickness-	60 feet, Associate	d Pressure- 325	0#	
8) Proposed To	otal Vertical	Depth: 7400'	TVD				
9) Formation a	t Total Verti	cal Depth: M	larcellus S	shale			
10) Proposed 7	Total Measur	ed Depth: 1	4,400' MD				
11) Proposed I	Horizontal Le	g Length: 64	167'				
12) Approxima	ate Fresh Wa	ter Strata Dept	ths:	51', 156'			
13) Method to	Determine F	resh Water De	enths: O	ffset well records. D	epths have been	adjusted accord	ling to surface elevations
14) Approxima			-		•		
15) Approxima				46. 1080'			1.6
		-			N	4	
(6) Approxima	ate Depth to I	ossible Void	(coal mir	ne, karst, other):	None anticipate	0	
17) Does Propo	osed well loc	ation contain	coal seam	ns			
directly overly	ing or adjace	nt to an active	mine?	Yes	N	0 🗸	
(a) If Yes, pro	ovide Mine I	nfo: Name:					
(-,, 1		Depth:					
		Seam:	-		77		
		Owner:					*
		Owner.					
DECE	IVED						

RECEIVED
Office of Oil and Gas

DEC 3 0 2013

Page 1 of 3

WV Department of Environmental Protection WW-6B (9/13)

18)

CASING AND TUBING PROGRAM

TYPE	Size	New or Used	Grade	Weight per ft. (lb/ft)	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill-up (Cu. Ft.)
Conductor	20"	New	H-40	94#	40'	40'	CTS,38 Cu. Ft.
Fresh Water	13-3/8"	New	J-55/H-40	54.5#/ 48#	320'	320'	CTS, 445 Cu. Ft
Coal	9-5/8"	New	J-55	36#	2480'	2480'	CTS,1010 Cu. Ft.
Intermediate							
Production	5-1/2"	New	P-110	20#	14400'	14400'	3559 Cu. Ft.
Tubing	2-3/8"	New	N-80	4.7#		7100'	
Liners							

TYPE Cement Yield Wellbore Wall **Burst Pressure** Cement Type Size Diameter **Thickness** (cu. ft./k) Conductor 20" 24" 0.438" 1530 Class A 1.18 Fresh Water 2730/1730 13-3/8" 17-1/2" 0.38"/0.33" Class A 1.18 Coal 9-5/8" 12-1/4" 3520 Class A 0.352" 1.18 Intermediate Production 5-1/2" 8-3/4" & 8-1/2" 0.361" 12630 Lead-H/POZ & Tail - H H/POZ-1.44 & H-1.8 Tubing 2-3/8" 4.778" 0.19" 11200 Liners

PACKERS

Kind:	N/A	
Sizes:	N/A	
Depths Set:	N/A	

RECEIVED
Office of Oil and Gas

DEC 3 0 2013

WV Department of Environmental Protection Page 2 of 3

19) Describe proposed well work, including the drilling and plugging back of any pilot hole:
Drill, perforate, fracture a new horizontal shallow well and complete Marcellus Shale.
20) Describe fracturing/stimulating methods in detail, including anticipated max pressure and max rate:
Antero plans to pump Slickwater into the Marcellus Shale formation in order to ready the well for production. The fluid will be comprised of approximately 99 percent water and sand, with less than 1 percent special-purpose additives as shown in the attached "List of Anticipated Additives Used for Fracturing or Stimulating Well."
21) Total Area to be disturbed, including roads, stockpile area, pits, etc., (acres): 23.32 acres
22) Area to be disturbed for well pad only, less access road (acres): 4.35 acres
23) Describe centralizer placement for each casing string:
Conductor: no centralizers Surface Casing: one centralizer 10' above the float shoe, one on the insert float collar and one every 4th joint spaced up the hole to surface. Intermediate Casing: one centralizer above float joint, one centralizer 5' above float collar and one every 4th collar to surface. Production Casing: one centralizer at shoe joint and one every 3 joints to top of cement in intermediate casing.
24) Describe all cement additives associated with each cement type:
Conductor: no additives, Class A cement. Surface: Class A cement with 2% calcium and 1/4 lb flake, 5 gallons of clay treat Intermediate: Class A cement with 1/4 lb of flake, 5 gallons of clay treat Production: Lead cement-50/50 Class H/Poz + 1.5% salt + 1% C-45 + 0.5% C-16a + 0.2% C-12 + 0.45% C-20 + 0.05% C-51 Production: Tail cement- Class H + 45 PPS Calcium Carbonate + 1.0% FL-160 + 0.2% ACGB-47 + 0.05% ACSA-51 + 0.2% ACR-20
25) Proposed borehole conditioning procedures: Conductor: blowhole clean with air, run casing, 10 bbls fresh water. Surface: blowhole clean with air, trip to conductor shoe, trip to bottom, blowhole clean with air, trip out, run casing, circulate pipe capacity + 40 bbls fresh water followed by 25 bbls bentonite mud, 10 bbls fresh water spacer. Intermediate: blowhole clean with air, trip to surface casing shoe, trip to bottom, blowhole clean with air, trip out, run casing, circulate 40 bbls brine water followed by 10 bbls fresh water and 25 bbls bentonite mud, pump 10 bbls fresh water. Production: circulate with 14 lb/gal NaCl mud, trip to middle of lateral, circulate, pump high viscosity sweep, trip to top of curve, trip to bottom, circulate, pump high viscosity sweep, trip out, run casing, circulate 10 bbls fresh water, pump 48 bbls barite pill, pump 10 bbls fresh water followed by 48 bbls mud flush and 10 bbls water.
*Note: Attach additional sheets as needed. Office of Oil and Gas Office of Oil and Gas WV Dept. of Environmental Protection Page 3 of 3

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION OFFICE OF OIL AND GAS

FLUIDS/CUTTINGS DISPOSAL & RECLAMATION PLAN

Operator Name Antero Resource	ces Corporation	OP Code	494488557
Watershed (HUC 10)_Meathou	se Fork	Quadrangle New Milton	
Elevation 1081	County Doddridge	District_	New Milton
Do you anticipate using more the Will a pit be used? Yes	nan 5,000 bbls of water to complete to		
If so, please describe a	incipated pit waste.		ed in tanks. Cultings will be tanked and hasted off site.) N/A
	thod For Treated Pit Wastes:	II so, what mi.	NA
Land Unde	Application erground Injection (UIC Permit Nur c (at API Number_Future permitted well lite Disposal (Supply form WW-9 for (Explain_	locations when applicable. API# will	
Will closed loop system be used	? If so, describe: Yes		
Drilling medium anticipated for	this well (vertical and horizontal)?	Air, freshwater, oil based,	Surface - Air/Freshweter, Intermediate - CEC. Dust/Snff Foom, Production - Water Based Mud
-If oil based, what type	? Synthetic, petroleum, etc. N/A		
Additives to be used in drilling	medium? Please See Attachment		
	Leave in pit, landfill, removed offsi	te, etc. Stored in tanks, remove	ed offsite and taken to landfill.
	o solidify what medium will be used		
	e/permit number? Meadowfill Landfill (
on August 1, 2005, by the Office provisions of the permit are enf- law or regulation can lead to enf- I certify under penalty	e of Oil and Gas of the West Virgini forceable by law. Violations of any forcement action. of law that I have personally exa	a Department of Environm term or condition of the g mined and am familiar w	ATER POLLUTION PERMIT issued ental Protection. I understand that the general permit and/or other applicable ith the information submitted on this ividuals immediately responsible for
obtaining the information, I be penalties for submitting false in	lieve that the information is true, formation, including the possibility	accurate, and complete.	ividuals immediately responsible for a may aware that there are reminiscant
Company Official Signature	2 well		Sec. 5013
Company Official (Typed Nam	e) Gerard G. Alberts		20 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
Company Official Title Enviro	onmental & Regulatory Manager		Mo of Oil and Gas Protect
Subscribed and sworn before me	this 13 day of N	Nota	NOV 22 NOV 22 NOV 22 NOT and Gas Protect Public State of Colorado Notary ID 20124072365
My commission expires	1119/2016		My Commission Expires Nov 9, 2016

Antero Perourose		Operator's V	Well No. Honey Unit 2H
Willelo Mesonices	Corporation		
Proposed Revegetation Treatm		C E	н
Lime 2-3	Tons/acre or to correct to pl		
	straw or Wood Fiber (will be used	where needed)	
Fertilizer amount 50	01	bs/acre	
Mulch 2-3	Tons	/acre	
	Area (1.66) + New Well Pad (4.35) + New)	Water Containment Pad (4.10) + New Excess/Toptoi	Material Stockpiles (8.42) = 23.32 New Acres
	Sec	ed Mixtures	
Tem	porary	Perma	anent
Seed Type	lbs/acre	Seed Type	lbs/acre
Annual Ryegrass	40	Crownvetch	10-15
"See attached Table 3 for additional seed to	ype (Snatus Run Pad Design Page 19)	"See attached Table 4a for additional seed by	pe (Snake Run Pad Design Page 19)
*or type of grass seed requ	ested by surface owner	*or type of grass seed requi	ested by surface owner
Drawing(s) of road, location, pi rovided)	t and proposed area for land ap	plication (unless engineered plans in	cluding this info have been
hotocopied section of involved	alos Noveland Mulch	- Mishad	Laff to low Dep
Comments: Nesce	alos Nawlo	- Mishad	Daff to low Dep

WV Department of

4.

Form WW-9 Additives Attachment

SURFACE INTERVAL

- 1. Fresh Water
- 2. Soap -Foamer AC
- 3. Air

INTERMEDIATE INTERVAL

STIFF FOAM RECIPE:

- 1) 1 ppb Soda Ash / Sodium Carbonate-Alkalinity Control Agent
- 2) 1 ppb Conqor 404 (11.76 ppg) / Corrosion Inhibitor
- 3) 4 ppb KLA-Gard (9.17 ppg) / Amine Acid Complex-Shale Stabilizer
- 4) 1ppb Mil Pac R / Sodium Carboxymethylcellulose-Filtration Control Agent
- 5) 12 ppb KCL / Potassium Chloride-inorganic Salt
- 6) Fresh Water 80 bbls
- 7) Air

PRODUCTION INTERVAL

- Alpha 1655
 - Salt Inhibitor
- 2. Mil-Carb
 - Calcium Carbonate
- Cottonseed Hulls
 - Cellulose-Cottonseed Pellets LCM
- Mil-Seal
 - Vegetable, Cotton & Cellulose-Based Fiber Blend LCM
- Clay-Trol
 - Amine Acid Complex Shale Stabilizer
- 6. Xan-Plex
 - Viscosifier For Water Based Muds
- Mil-Pac (All Grades)
 - Sodium Carboxymethylcellulose Filtration Control Agent
- 8. New Drill
 - Anionic Polyacrylamide Copolymer Emulsion Shale Stabilizer
- 9. Caustic Soda
 - Sodium Hydroxide Alkalinity Control
- Mil-Lime
 - Calcium Hydroxide Lime
- 11. LD-9
- Polyether Polyol Drilling Fluid Defoamer
- 12. Mil Mica
 - Hydro-Biotite Mica LCM



13. Escaid 110

Drilling Fluild Solvent - Aliphatic Hydrocarbon

4701706421

14. Ligco

Highly Oxidized Leonardite - Filteration Control Agent

15. Super Sweep

Polypropylene - Hole Cleaning Agent

16. Sulfatrol K

Drilling Fluid Additive - Sulfonated Asphalt Residuum

Sodium Chloride, Anhydrous

Inorganic Salt

18. D-D

Drilling Detergent - Surfactant

19. Terra-Rate

Organic Surfactant Blend

20. W.O. Defoam

Alcohol-Based Defoamer

21. Perma-Lose HT

Fluid Loss Reducer For Water-Based Muds

22. Xan-Plex D

Polysaccharide Polymer - Drilling Fluid Viscosifier

23. Walnut Shells

Ground Cellulosic Material - Ground Walnut Shells - LCM

24. Mil-Graphite

Natural Graphite - LCM

25. Mil Bar

Barite - Weighting Agent

26. X-Cide 102

Biocide

27. Soda Ash

Sodium Carbonate - Alkalinity Control Agent

28. Clay Trol

Amine Acid complex - Shale Stabilizer

Sulfatrol

Sulfonated Asphalt - Shale Control Additive

Xanvis

Viscosifier For Water-Based Muds

31. Milstarch

Starch - Fluid Loss Reducer For Water Based Muds

32. Mil-Lube

Drilling Fluid Lubricant

MA Deby of Environmental Subscription



Well Site Safety Plan Antero Resources

Well Name: Dufflemeyer Unit 1H, Dufflemeyer Unit 2H,

Honey Unit 1H, Honey Unit 2H, Asena Unit 1H,

Asena Unit 2H

Pad Location: Snake Run Pad

Doddridge County/ New Milton District

GPS Coordinates: Lat 39°12'17.52"/Long -80°39'3.68" (NAD83)

Driving Directions:

From New Milton:

Head SW on CO Route 25/ Meathouse Fork Rd. for 3.8 miles until past the intersection with CO Route 25/8 Snake Run Branch. Access Road will be on left.

RECEIVED

Office of Oil and Gas

DEC 3 0 2013

WV Department of Environmental Protection DCN 2013

west virginia department of environmental protection



Water Management Plan: Primary Water Sources



WMP-01682

API/ID Number:

047-017-06421

Operator:

Antero Resources

Honey Unit 2H

Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- ·Identification of sensitive aquatic life (endangered species, mussels, etc.);
- Quantification of known existing demands on the water supply (Large Quantity Users);
- . Minimum flows required by the Army Corps of Engineers; and
- Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

DEP is aware that some intake points will be used for mutiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interepreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at DEP.water.use@wv.gov.

APPROVED DEC 1 6 2013 -

Source Summary WMP-01682 API Number: 047-017-06421 Operator: Antero Resources Honey Unit 2H Stream/River Source Ohio River @ Ben's Run Withdrawal Site Tyler Owner: Ben's Run Land Company **Limited Partnership** Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: -81.110781 6/14/2014 6/14/2015 7,020,000 39.46593 ✓ Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam Max. Pump rate (gpm): 3,360 Min. Gauge Reading (cfs): 6,468.00 Min. Passby (cfs) Refer to the specified station on the National Weather Service's Ohio River forecast **DEP Comments:** website: http://www.erh.noaa.gov/ohrfc//flows.shtml West Fork River @ JCP Withdrawal Harrison Owner: James & Brenda Raines Source Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 6/14/2014 6/14/2015 7,020,000 39.320913 -80.337572 Regulated Stream? Stonewall Jackson Dam Ref. Gauge iD: 3061000 WEST FORK RIVER AT ENTERPRISE, WV Min. Gauge Reading (cfs): 175.00 Min. Passby (cfs) 146.25 Max. Pump rate (gprn): 2,000 **DEP Comments:**

West Fork River @ McDonald Withdrawal

Harrison

Owner:

David Shrieves

6/14/2014

End Date 6/14/2015 Total Volume (gal) 7,020,000

Max. daily purchase (gal)

Intake Latitude: Intake Longitude: 39.16761

-80.45069

Regulated Stream? Stonewall Jackson Dam Ref. Gauge ID:

3061000

WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm):

3,000

Min. Gauge Reading (cfs):

175.00

Min. Passby (cfs)

106.30

DEP Comments:

Source	West Fork Rive	er @ GAL Withdra	wal		Harrison	Owner:	David Shrieves
Start Date 6/14/2014	End Date 6/14/2015		Volume (gal) ,020,000	Max. daily p	urchase (gal)	Intake Latitude: 39.16422	Intake Longitude: -80.45173
☑ Regulated	Stream? Ston	ewall Jackson Dan	n Ref. Gauge I	D: 30610 0	00	WEST FORK RIVER AT ENTE	ERPRISE, WV
Max. Pump	rate (gpm): DEP Comme	200	n. Gauge Read	ling (cfs):	175.00	Min. Passby (c	fs) 106.30
Source	Middle Island	Creek @ Mees Wi	thdrawal Site		Pleasants	Owner:	Sarah E. Mees
Start Date 6/14/2014	End Date 6/14/2015		Volume (gal) ,020,000	Max. daily p	urchase (gal)	Intake Latitude: 39.43113	Intake Longitude: -81.079567
Regulated	Stream?		Ref. Gauge I	D: 31145 0	00	MIDDLE ISLAND CREEK AT	LITTLE, WV
Max. Pump	rate (gpm): DEP Comme		n. Gauge Read	ling (cfs):	52.59	Min. Passby (c	fs) 47.63
® Source	Middle Island	Creek @ Dawson	Withdrawal		Tyler	Owner: G	ary D. and Rella A. Dawson
Start Date 6/14/2014			Volume (gal) ,020,000	Max. daily p	urchase (gal)	Intake Latitude: 39.379292	Intake Longitude: -80.867803
Regulated	Stream?		Ref. Gauge II	D: 31145 0	00	MIDDLE ISLAND CREEK AT	LITTLE, WV
Max. Pump	rate (gpm): DEP Comme	10.0000	n. Gauge Read	ling (cfs):	76.03	Min. Passby (c	(s) 28.83

o Source	meandy creek	e l'orest	Withdrawal		Tyler	Owner: F	orest C. & Brenda L. Moore
Start Date 6/14/2014	End Date 6/14/2015		Total Volume (gal) 7,020,000	Max. daily p	urchase (gal)	Intake Latitude 39.39675	: Intake Longitude -80.738197
Regulated	Stream?		Ref. Gauge I	D: 311450	00	MIDDLE ISLAND CREEK A	T LITTLE, WV
Max. Pump	rate (gpm):	1,000	Min. Gauge Read	fing (cfs):	74.77	Min. Passby (cfs) 13.10
	DEP Commer	nts:					
Source	Meathouse Fo	rk @ Gagn	on Withdrawal		Doddridge	Owner: Ge	orge L. Gagnon and Susan C. Gagnor
Start Date	End Date		Total Volume (gal)	Max. daily p	urchase (gal)	Intake Latitude	: Intake Longitude:
6/14/2014	6/14/2015		7,020,000			39.26054	-80.720998
Regulated	Stream?		Ref. Gauge 1	D: 311450	0	MIDDLE ISLAND CREEK A	T LITTLE, WV
Max. Pump	rate (gpm):	1,000	Min. Gauge Read	ling (cfs):	71.96	Min. Passby (cfs) 11.74
	DEP Commer	nts:					
© Source	Meathouse Fo	k @ White	ehair Withdrawal		Doddridge	Owner:	Elton Whitehair
Start Date	End Date		Total Volume (gal)	Max. daily p	urchase (ga!)	Intake Latitude	: Intake Longitude:
6/14/2014	6/14/2015		7,020,000			39.211317	-80.679592
☐ Regulated	Stream?		Ref. Gauge I	D: 311450	0	MIDDLE ISLAND CREEK A	T LITTLE, WV
Max. Pump	rate (gpm):	1,000	Min. Gauge Read	ling (cfs):	69.73	Min. Passby (cís) 7.28
	DEP Commer	nts:					

o source	TOM S POIK @ E		ai awai		Doddridge	Owner. John F. E	Erwin
Start Date 6/14/2014	End Date 6/14/2015		Total Volume (gal) 7,020,000	Max. daily p	urchase (gal)	Intake Latitude: 39.174306	Intake Longitude: -80.702992
Regulated	Stream?		Ref. Gauge I	D: 31145 0	00	MIDDLE ISLAND CREEK AT	LITTLE, WV
Max. Pump	rate (gpm): DEP Commen	1,000	Min. Gauge Read	ling (cfs):	69.73	Min. Passby (c	fs) 0.59
Source	Arnold Creek @	Davis Wit	hdrawal		Doddridge	Owner:	Jonathon Davis
Start Date 6/14/2014	End Date 6/14/2015		Total Volume (gal) 7,020,000	Max. daily p	urchase (gal)	Intake Latitude: 39.302006	Intake Longitude: -80.824561
Regulated	Stream?		Ref. Gauge I	D: 31145 0	00	MIDDLE ISLAND CREEK AT	LITTLE, WV
Max. Pump	rate (gpm): DEP Commer	1,000	Min. Gauge Read	ling (cfs):	69.73	Min. Passby (c	fs) 3.08
Source	Buckeye Creek	@ Powell \	Vithdrawal		Doddridge	Owner:	Dennis Powell
Start Date 6/14/2014	End Date 6/14/2015		Total Volume (gal) 7,020,000	Max. daily p	urchase (gal)	Intake Latitude: 39.277142	Intake Longitude: -80.690386
Regulated	Stream?		Ref. Gauge I	D: 31145 0	00	MIDDLE ISLAND CREEK AT	LITTLE, WV
Max. Pump	rate (gpm): DEP Commen	1,000	Min. Gauge Read	ling (cfs):	69.73	Min. Passby (c	fs) 4.59

0	Source	South Fork of I	Hughes Riv	er @ Knight Withdrawal		Ritchie	Owner:	Tracy C. Knight & Stephanie C. Knight
	Start Date 6/14/2014	End Date 6/14/2015		Total Volume (gal) 7,020,000	Max. daily puro	chase (gal)	Intake Latitude: 39.198369	Intake Longitude: -80.870969
	☐ Regulated	Stream?		Ref. Gauge ID:	3155220	OUTH F	ORK HUGHES RIVER BELO	W MACFARLAN, W\
	Max. Pump	rate (gpm):	3,000	Min. Gauge Readir	ng (cfs):	39.80	Min. Passby (c	fs) 1.95
		DEP Commer	nts:					
0	Source	North Fork of I	Hughes Riv	er @ Davis Withdrawal		Ritchie	Owner: Lewis P	. Davis and Norma J. Davis
	Start Date 6/14/2014	End Date 6/14/2015		Total Volume (gal) 7,020,000	Max. daily purc	hase (gal)	Intake Latitude: 39.322363	Intake Longitude: -80.936771
	☐ Regulated	Stream?		Ref. Gauge ID:	3155220	OUTH F	ORK HUGHES RIVER BELO	W MACFARLAN, W\
	Max. Pump	rate (gpm):	1,000	Min. Gauge Readir	ng (cfs):	35.23	Min. Passby (c	fs) 2.19
		DEP Commer	nts:					

Source Summary WMP-01682 API Number: 047-017-06421 Operator: Antero Resources Honey Unit 2H **Purchased Water** e Source Ohio River @ Select Energy Pleasants Owner: Select Energy Max. daily purchase (gal) Start Date End Date Total Volume (gal) Intake Latitude: Intake Longitude: 6/14/2014 6/14/2015 7,020,000 500,000 39.346473 -81.338727 ✓ Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999998 Ohio River Station: Racine Dam 7,216.00 Min. Passby (cfs) Max. Pump rate (gpm): 1,680 Min. Gauge Reading (cfs): Refer to the specified station on the National Weather Service's Ohio River forecast DEP Comments: website: http://www.erh.noaa.gov/ohrfc//flows.shtml Source Middle Island Creek @ Solo Construction Pleasants Owner: Solo Construction, LLC Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: Start Date End Date 6/14/2014 6/14/2015 7,020,000 1,000,000 39.399094 -81.185548 ✓ Regulated Stream? Ohio River Min. Flow Ref. Gauge ID: 9999999 Ohio River Station: Willow Island Lock & Dam Min. Passby (cfs) Min. Gauge Reading (cfs): 6,468.00 Max. Pump rate (gpm): **DEP Comments:** Elevation analysis indicates that this location has the same elevation as Middle Island Creek's pour point into the Ohio River. As such, it is deemed that water flow at this location is heavily influenced by the Ohio River. Wood Claywood Park PSD Claywood Park PSD Owner: Source

Max. Pump rate (gpm): Min. Gauge Reading (cfs): 7,216.00 Min. Passby (cfs)

Total Volume (gal)

7,020,000

DEP Comments: Elevation analysis indicates that this location has approximately the same elevation as Little Kanawha's pour point into the Ohio River. As such, it is deemed that water flow

Max. daily purchase (gal)

Intake Latitude: Intake Longitude:

End Date

6/14/2015


Start Date

6/14/2014


Start Date End Date Total Volume (gal) Max. daily purchase (gal) Intake Latitude: Intake Longitude: 6/14/2014 6/14/2015 7,020,000 200,000 Intake Latitude: Intake Longitude: 7,020,000 WEST FORK RIVER AT ENTERPRISE, WV

Max. Pump rate (gpm): Min. Gauge Reading (cfs): 171.48 Min. Passby (cfs)

DEP Comments:

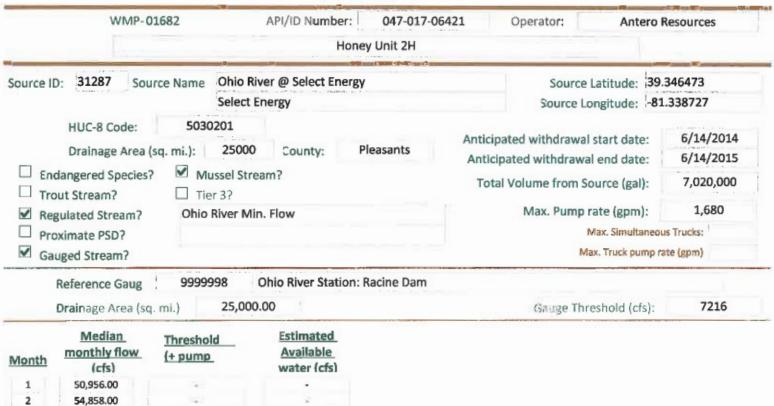

Month	monthly flow (cfs)	(+ pump	Available water (cfs)
1	50,956.00	348	
2	54,858.00	140	2
3	73,256.00	520	=
4	62,552.00		2
5	43,151.00	1.50	•
6	27,095.00	- 6	
7	17,840.00	525	*
8	14,941.00	3.00	8
9	14,272.00	190	18
10	17,283.00	063	
11	29,325.00	730	181
12	46,050.00	5.60	
	-		

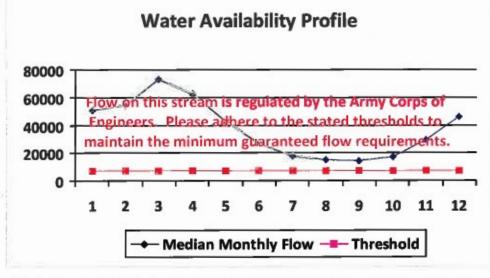


Base Threshold (cfs):	
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	3.74
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00

Source Detail API/ID Number: WMP-01682 047-017-06421 Operator: Antero Resources Honey Unit 2H Middle Island Creek @ Solo Construction Source Latitude: 39.399094 Source ID: 31288 Source Name Solo Construction, LLC Source Longitude: -81.185548 5030201 HUC-8 Code: Anticipated withdrawal start date: 6/14/2014 25000 Drainage Area (sq. mi.): County: **Pleasants** 6/14/2015 Anticipated withdrawal end date: ✓ Mussel Stream? **Endangered Species?** Total Volume from Source (gal): 7,020,000 ☐ Trout Stream? ☐ Tier 3? Max. Pump rate (gpm): Regulated Stream? Ohio River Min. Flow Max. Simultaneous Trucks: Proximate PSD? City of St. Marys ✓ Gauged Stream? Max. Truck pump rate (gpm) Ohio River Station: Willow Island Lock & Dam Reference Gaug

Month	Median monthly flow (cfs)	Threshold (+ pump	<u>Available</u> water (cfs)
1	45,700.00		
2	49,200.00	58	
3	65,700.00		
4	56,100.00	14	
5	38,700.00	(4)	
6	24,300.00	74	- 2
7	16,000.00		
. 8	13,400.00		2
9	12,800.00	92	
10	15,500.00		25
11	26,300.00	7	
12	41,300.00	13	1

Drainage Area (sq. mi.)

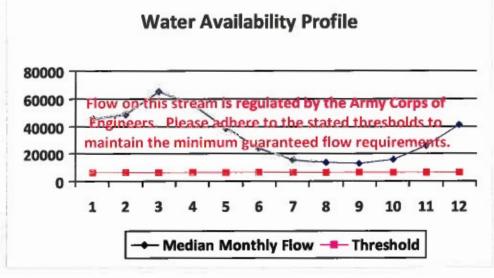

25,000.00


Base Threshold (cfs):	-
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	

Gauge Threshold (cfs):

6468

	Source	Detail		-
WMP-01682	API/ID Number:	047-017-06421	Operator: Antero I	Resources
	Honey	Unit 2H		
Source ID: 31289 Source Name	Claywood Park PSD		Source Latitude: -	V
	Claywood Park PSD		Source Longitude:	
HUC-8 Code: 5030203 Drainage Area (sq. mi.): 25000 County: Wood □ Endangered Species?		Vood	Anticipated withdrawal start date: 6/14/2 Anticipated withdrawal end date: 6/14/2 Total Volume from Source (gal): 7,020	
✓ Regulated Stream?			Max. Pump rate (gpm):	
	vood Park PSD		Max. Simultaneou	us Trucks: 0
✓ Gauged Stream?			Max. Truck pump ra	ate (gpm) 0
Reference Gaug 99999	Ohio River Station: Ra	cine Dam		
Drainage Area (sq. mi.)	25,000.00		Gauge Threshold (cfs):	7216
Median Thresho Month (cfs)	Austlabla			

Month	monthly flow (cfs)	(+ pump	Available water (cfs)
1	50,956.00		
2	54,858.00	34	5.5
3	73,256.00		E .
4	62,552.00	E4 :	F)
5	43,151.00	14.	H2
6	27,095.00		26
7	17,840.00	12	
8	14,941.00	V.	21
9	14,272.00	-	29
10	17,283.00	15	
11	29,325.00	520	
12	46,050.00	12.1	

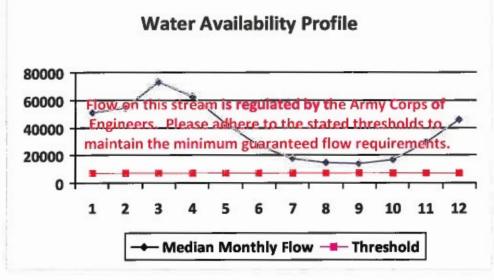

Base Threshold (cfs):	-
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	

WMP-0				
	1682			esources
		Honey Unit	2Н	
290 Sou	rce Name Sun V	alley Public Service District	Source Latitude: -	
	Sun V	alley PSD	Source Longitude: -	
0.0040	14.407			
8 Code:	i.		Anticipated withdrawal start date:	6/14/2014
nage Area (sq. mi.): 391.8	35 County: Harrison	n	6/14/2015
ed Species	Mussel St	ream?	i	
	_		lotal volume from Source (gal):	7,020,000
	F- +	ckson Dam	Max. Pump rate (gpm):	
			Max. Simultaneou	s Trucks:
			Max. Truck pump ra	te (gpm)
tream?			The state of the s	100000
ence Gaug	3061000	WEST FORK RIVER AT ENT	ERPRISE, WV	
ige Area (so	. mi.) . 759	0.00	Gauge Threshold (cfs):	234
ladian		Estimated		
	(+ pump	water (cfs)		
		==		
51.92	18	20		
41.33	E4			
		*:		
		2 7		
	14	*		
		= =		
0.0000000000000000000000000000000000000				
"	-			
	c-8 Code: inage Area (red Species) eam? d Stream? e PSD? stream?	Sun V 2-8 Code: 5020002 Inage Area (sq. mi.): 391.8 Ped Species? Mussel St Peam? Tier 3? Stonewall Ja Pe PSD? Itream? Ince Gaug 3061000 Inge Area (sq. mi.) 759 Iledian Threshold (+ pump) Ince Gaug 12.21 Ince Gaug 13.86 Ince Gaug 15.89 Ince Gaug 16.87 Ince Gaug 16.87 Ince Gaug 17.89 Ince Gaug 17.89 Ince Gaug 17.89 Ince Gaug 18.86 Ince Gaug 18	Sun Valley PSD 2-8 Code: 5020002 Inage Area (sq. mi.): 391.85 County: Harriso red Species? Mussel Stream? eam? Tier 3? Stonewall Jackson Dam e PSD? Itream? Ince Gaug 3061000 WEST FORK RIVER AT ENT age Area (sq. mi.) 759.00 Idedian Threshold (+ pump Available water (cfs) 100.75 151.92 141.33 15.89 102.23 112.21 113.86 16.87 10.48 16.17 174.45	Sun Valley PSD Source Longitude: -8-8 Code: 5020002 Inage Area (sq. mi.): 391.85 County: Harrison Anticipated withdrawal start date: Anticipated withdrawal end date: Total Volume from Source (gal): Ped Species? Mussel Stream? Stonewall Jackson Dam By PSD? Max. Pump rate (gpm): Max. Pump rate (gpm): Max. Simultaneou Max. Truck pump rate (gpm): Max. Truck pump

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

10

11

9

Median Monthly Flow -- Threshold

12

0.00

Ungauged Stream Safety (cfs):


Min. Gauge Reading (cfs):

Passby at Location (cfs):

1

2

3

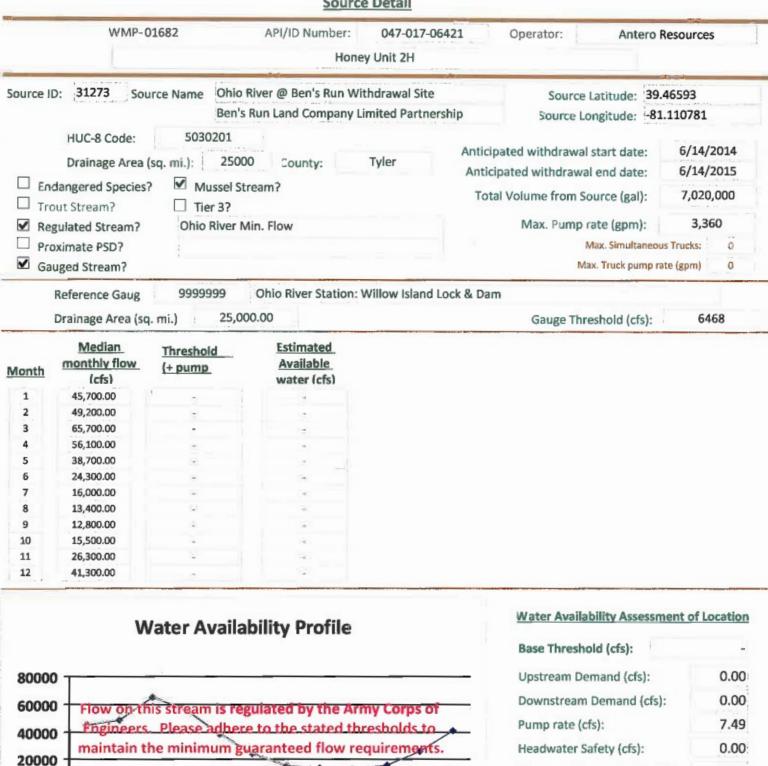

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

– Threshold

10

11

12

8

O

1

2


5


Median Monthly Flow -

0.00

Ungauged Stream Safety (cfs):

Min. Gauge Reading (cfs): Passby at Location (cfs):

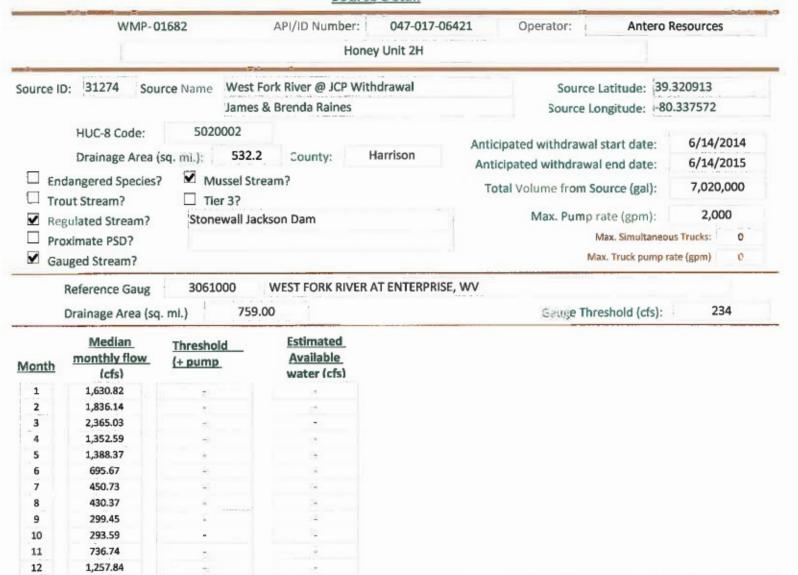

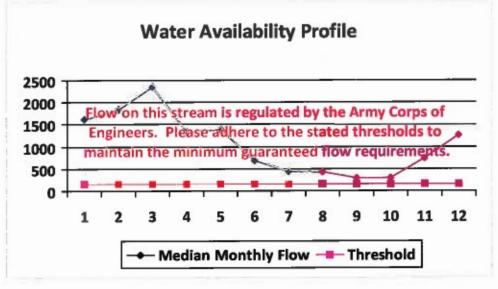

Base Threshold (cfs):	-
Upstream Demand (cfs):	24.29
Downstream Demand (cfs):	0.00
Pump rate (cfs):	4.46
Headwater Safety (cfs):	0.00
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	
Passby at Location (cfs):	

			Source Detail	,
	WMP-0	1682	API/ID Number: 047-0 Honey Unit 2H	17-06421 Operator: Antero Resources
Source #	D: 31275 Sou	David	Fork River @ McDonald Withd Shrieves	Source Latitude: 39.16761 Source Longitude: -80.45069
☐ Tro	HUC-8 Code: Drainage Area (dangered Species) out Stream? gulated Stream? oximate PSD? uged Stream?		tream?	Anticipated withdrawal start date: 6/14/2014 Anticipated withdrawal end date: 6/14/2015 Total Volume from Source (gal): 7,020,000 Max. Pump rate (gpm): 3,000 Max. Simultaneous Trucks: 0 Max. Truck pump rate (gpm) 0
	Reference Gaug Drainage Area (sq	3061000 . mi.) 759	WEST FORK RIVER AT ENTER 9.00	PRISE, WV Gauge Threshold (cfs): 234
Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)	
1	964.98	17.1		
2	1,086.47	3	*	
3	1,399.42			
4	800.34	3		
5	821.52	4	33	
6	411.64		*	
7	266.70	540		
8	254.66 177.19		-	
10	173.72	720		
11	435.94			
12	744.28	7	5	
	W	/ater Availa	bility Profile	Water Availability Assessment of Location
				Base Threshold (cfs):
1500	Τ .			Upstream Demand (cfs): 24.29
			gulated by the Army Corp	Downstream Demand (cfs): 0.00
			MILITARON BUILDING REPORT COLD	COT
1000	-	1		
1000	Engineers	. Please adher	e to the stated threshold	Pump rate (cfs): 6.68
1000 500	Engineers	. Please adher		Pump rate (cfs): 6.68


"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawai location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

- Median Monthly Flow -- Threshold

10

11 12

Min. Gauge Reading (cfs): Passby at Location (cfs):

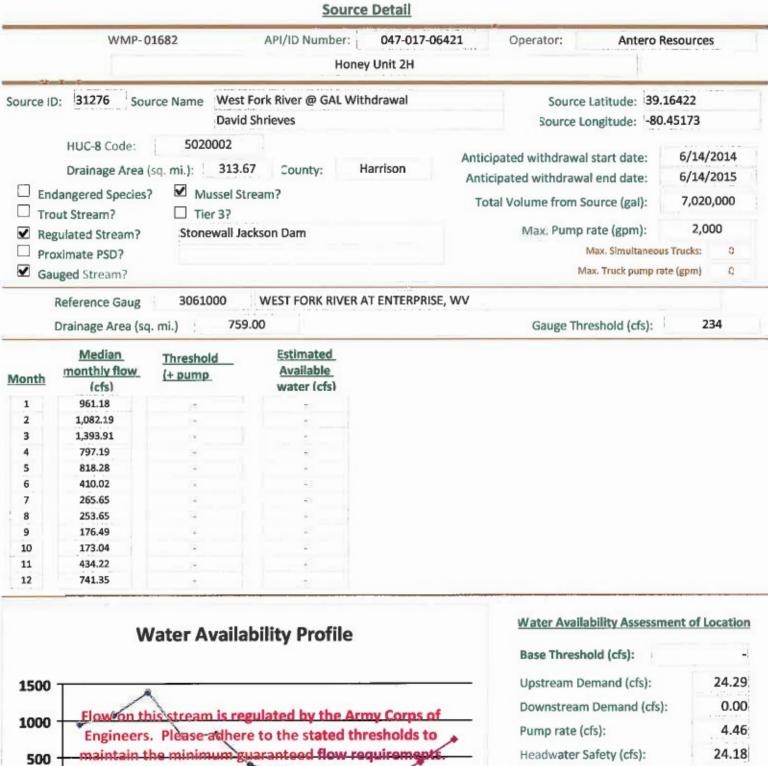

- Threshold

10

11

12

0.00

Ungauged Stream Safety (cfs):

Min. Gauge Reading (cfs):

Passby at Location (cfs):

Median Monthly Flow

1

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.


Source Detail WMP-01682 API/ID Number: 047-017-06421 Operator: Antero Resources Honey Unit 2H Source Latitude: 39.43113 Source ID: |31277 Source Name Middle Island Creek @ Mees Withdrawal Site Sarah E. Mees Source Longitude: -81.079567 5030201 HUC-8 Code: 6/14/2014 Anticipated withdrawal start date: Drainage Area (sq. mi.): 484.78 County: Pleasants 6/14/2015 Anticipated withdrawal end date: Endangered Species? ✓ Mussel Stream? Total Volume from Source (gal): 7,020,000 ☐ Trout Stream? ☐ Tier 3? Max. Pump rate (gpm): 3,360

Reference Gaug	3114500	MIDDLE ISLAND CREEK AT	LITTLE, WV	
Drainage Area (sq.	mi.) 45	8.00	Gauge Threshold (cfs):	45

Month	Median monthly flow (cfs)	Threshold (+ pump	Available water (cfs)
1	519.88	55.12	465.14
2	653.95	55.12	599.22
3	731.75	55.12	677.01
4	543.38	55.12	488.65
5	286.64	55.12	231.90
6	100.10	55.12	45.36
7	56.65	55.12	1.91
8	46.64	55.12	-8.10
9	23.89	55.12	-30.85
10	30.01	55.12	-24.72
11	146.56	55.12	91.83
12	358.10	55.12	303.37

☐ Regulated Stream?☐ Proximate PSD?

✓ Gauged Stream?

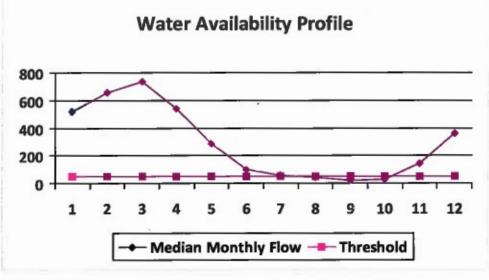



Passby at Location (cfs):	47.63
Min. Gauge Reading (cfs):	52.49
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.00
Pump rate (cfs):	7.49
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	47.63

Max. Simultaneous Trucks:

Max, Truck pump rate (gpm)

0

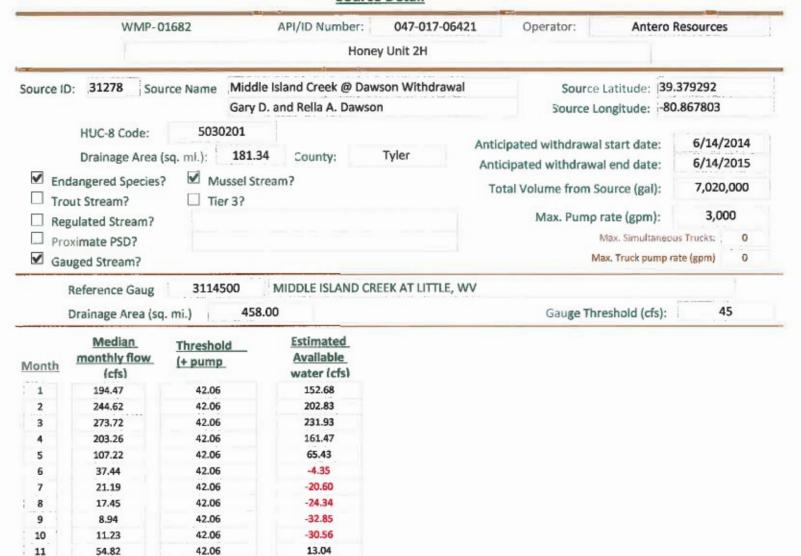

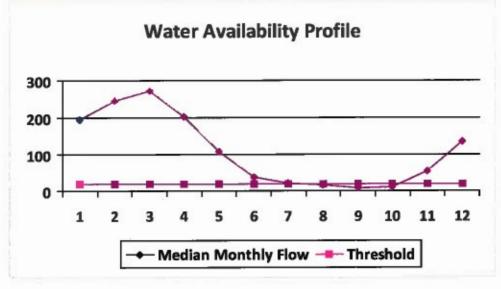

92.17

42.06


Passby at Location (cfs):	28.82
Min. Gauge Reading (cfs):	76.03
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	4.45
Pump rate (cfs):	6.68
Downstream Demand (cfs):	6.55
Upstream Demand (cfs):	13.10
Base Threshold (cfs):	17.82

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.


133.96

12




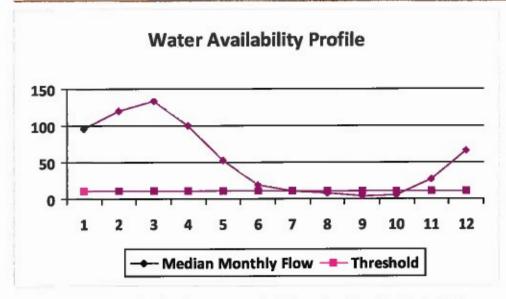


Passby at Location (cfs):	13.09
Min. Gauge Reading (cfs):	74.19
Ungauged Stream Safety (cfs):	2.18
Headwater Safety (cfs):	2.18
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	4.46
Base Threshold (cfs):	8.73

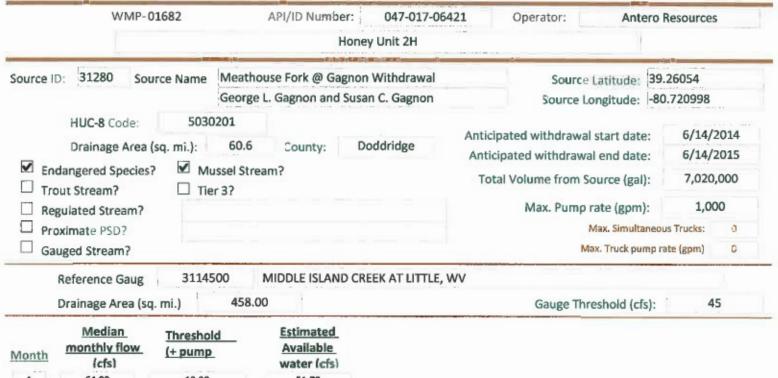

Month	Median monthly flow (cfs)	Threshold (+ pump	Available water (cfs)
1	64.99	13.39	51.70
2	81.75	13.39	68.46
3	91.47	13.39	78.19
4	67.93	13.39	54.64
5	35.83	13.39	22.55
6	12.51	13.39	-0.77
7	7.08	13.39	-6.20
8	5.83	13.39	-7.45
9	2.99	13.39	-10.30
10	3.75	13.39	-9.53
11	18.32	13.39	5.04
12	44.76	13.39	31.48

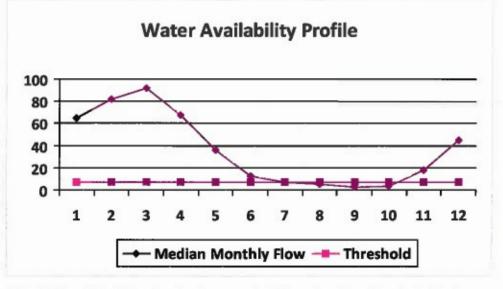

Passby at Location (cfs):	11.74
Min. Gauge Reading (cfs):	71.96
Ungauged Stream Safety (cfs):	1.49
Headwater Safety (cfs):	1.49
Pump rate (cfs):	2.23
Downstream Demand (cfs):	2.81
Upstream Demand (cfs):	2.23
Base Threshold (cfs):	5.95

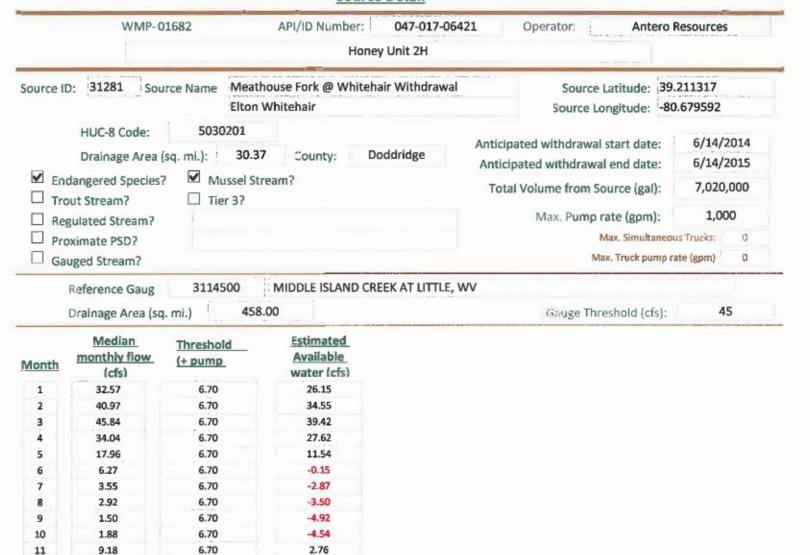

Water Availability Profile 50 40 30 20 10 1 2 3 4 5 6 7 8 9 10 11 12 Median Monthly Flow Threshold

15.01


6.70


Passby at Location (cfs):	7.29
Min. Gauge Reading (cfs):	69.73
Ungauged Stream Safety (cfs):	0.75
Headwater Safety (cfs):	0.75
Pump rate (cfs):	2.23
Downstream Demand (cfs):	2.81
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	2.98

[&]quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

12

22.43

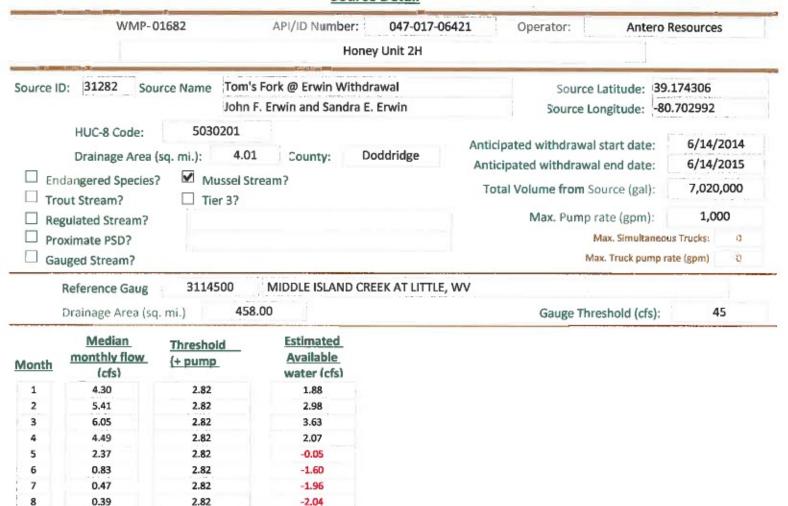

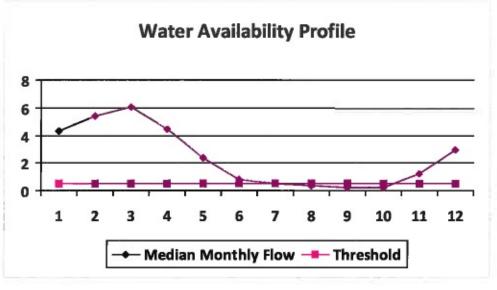

-2.23

-2.18

-1.21

0.54

2.82

2.82

2.82

2.82

Passby at Location (cfs):	0.59
Min. Gauge Reading (cfs):	69.73
Ungauged Stream Safety (cfs):	0.10
Headwater Safety (cfs):	0.10
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	0.39

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

9

10

11 12 0.20


0.25

1.21

2.96

Source Detail WMP-01682 API/ID Number: 047-017-06421 Operator: Antero Resources Honey Unit 2H Source ID: 31283 Arnold Creek @ Davis Withdrawal Source Name Source Latitude: |39.302006 Jonathon Davis Source Longitude: -80.824561 5030201 HUC-8 Code: 6/14/2014 Anticipated withdrawal start date: Drainage Area (sq. mi.): 20.83 Doddridge County: Anticipated withdrawal end date: 6/14/2015 **Endangered Species?** ✓ Mussel Stream? Total Volume from Source (gal): 7,020,000 Trout Stream? ☐ Tier 3? Max. Pump rate (gpm): 1,000 ☐ Regulated Stream? Proximate PSD? Max. Simultaneous Trucks; Gauged Stream? Max. Truck pump rate (gpm) 0 3114500 MIDDLE ISLAND CREEK AT LITTLE, WV Reference Gaug 458.00 Drainage Area (sq. mi.)


Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	22.34	5.30	17.29
2	28.10	5.30	23.05
3	31.44	5.30	26.39
4	23.35	5.30	18.30
5	12.32	5.30	7.26
6	4.30	5.30	-0.75
7	2.43	5.30	-2.62
8	2.00	5.30	-3.05
9	1.03	5.30	-4.03
10	1.29	5.30	-3.76
11	6.30	5.30	1.25
12	15.39	5.30	10.34

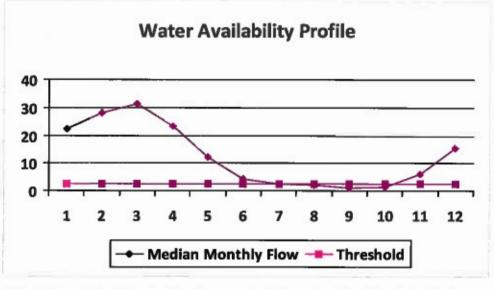


Passby at Location (cfs):	3.07
Min. Gauge Reading (cfs):	69.73
Ungauged Stream Safety (cfs):	0.51
Headwater Safety (cfs):	0.51
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	2.05

Gauge Threshold (cfs):

45

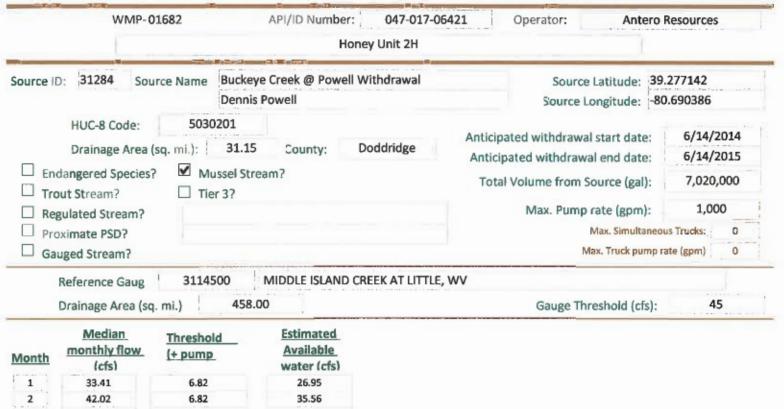

Month	monthly flow (cfs)	(+ pump	Available water (cfs)
1	33.41	6.82	26.95
2	42.02	6.82	35.56
3	47.02	6.82	40.56
4	34.92	6.82	28.46
5	18.42	6.82	11.96
6	6.43	6.82	-0.03
7	3.64	6.82	-2.82
8	3.00	6.82	-3.46
9	1.53	6.82	-4.92
: 10	1.93	6.82	-4.53
11	9.42	6.82	2.96
12	23.01	6.82	16.55

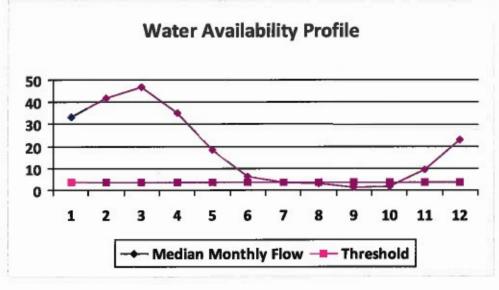

Passby at Location (cfs):	4.59
Min. Gauge Reading (cfs):	69.73
Ungauged Stream Safety (cfs):	0.77
Headwater Safety (cfs):	0.77
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	3.06

Source Detail WMP-01682 047-017-06421 API/ID Number: Operator: Antero Resources Honey Unit 2H Source ID: 31285 Source Name South Fork of Hughes River @ Knight Withdrawal Source Latitude: '39.198369 Tracy C. Knight & Stephanie C. Knight Source Longitude: |-80.870969 5030203 HUC-8 Code: 6/14/2014 Anticipated withdrawal start date: 16.26 Ritchie Drainage Area (sq. mi.): County: Anticipated withdrawal end date: 6/14/2015 ✓ Endangered Species? ✓ Mussel Stream? Total Volume from Source (gal): 7,020,000 ☐ Trout Stream? ☐ Tier 3? 3,000 Max. Pump rate (gpm): ☐ Regulated Stream? 0 ☐ Proximate PSD? Max. Simultaneous Trucks: ✓ Gauged Stream? Max. Truck pump rate (gpm) 0

SOUTH FORK HUGHES RIVER BELOW MACFARLAN, WV

Drainage Area (sq. mi.) 229.00			
Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	45.67	14.26	31.44
2	59.55	14.26	45.31
3	65.21	14.26	50.97
4	36.87	14.26	22.63
5	25.86	14.26	11.63
6	13.90	14.26	-0.33
7	6.89	14.26	-7.34
8	3.98	14.26	-10.25
9	4.79	14.26	-9.45
10	5.20	14.26	-9.04

14.26

14.26

3155220


Reference Gaug

15.54

32.06

11

12

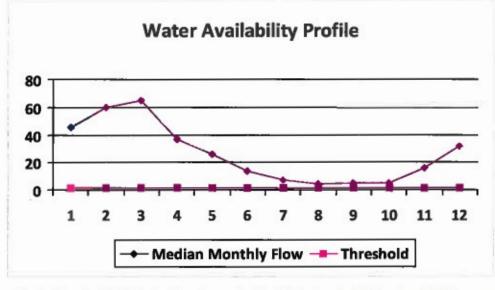

1.30

17.82

Passby at Location (cfs):	1.95
Min. Gauge Reading (cfs):	39.80
Ungauged Stream Safety (cfs):	0.00
Headwater Safety (cfs):	0.39
Pump rate (cfs):	6.68
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	5.62
Base Threshold (cfs):	1.56

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.


22

Gauge Threshold (cfs):

Source Detail WMP-01682 API/ID Number: 047-017-06421 Operator: Antero Resources Honey Unit 2H Source ID: 31286 Source Name North Fork of Hughes River @ Davis Withdrawal Source Latitude: 39.322363 Source Longitude: -80.936771 Lewis P. Davis and Norma J. Davis 5030203 HUC-8 Code: 6/14/2014 Anticipated withdrawal start date: 15.18 Ritchie Drainage Area (sq. mi.): County: Anticipated withdrawal end date: 6/14/2015 ✓ Mussel Stream? ✓ Endangered Species? 7,020,000 Total Volume from Source (gal): ☐ Trout Stream? ☐ Tier 3? 1,000 Max. Pump rate (gpm): ☐ Regulated Stream? Max. Simultaneous Trucks: 0 Proximate PSD? ☐ Gauged Stream? Max. Truck pump rate (gpm) 0 3155220 SOUTH FORK HUGHES RIVER BELOW MACFARLAN, WV Reference Gaug

Month	Median monthly flow (cfs)	Threshold (+ pump	Available water (cfs)
1	42.64	4.42	38.36
2	55.59	4.42	51.32
3	60.88	4.42	56.60
4	34.42	4.42	30.14
5	24.15	4.42	19.87
6	12.98	4.42	8.70
. 7	6.44	4.42	2.16
8	3.72	4.42	-0.56
9	4.47	4.42	0.19
10	4.85	4.42	0.57
11	14.50	4.42	10.23
12	29.93	4.42	25.65

Drainage Area (sq. mi.)

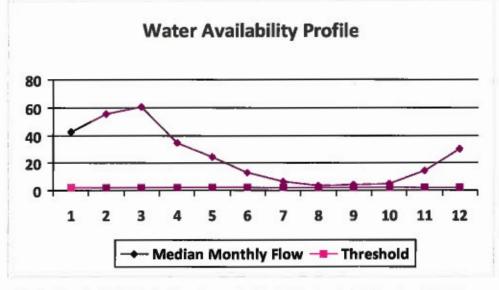

229.00

Min. Gauge Reading (cfs): Passby at Location (cfs):	35.23 2.19
Ungauged Stream Safety (cfs):	0.36
Headwater Safety (cfs):	0.36
Pump rate (cfs):	2.23
Downstream Demand (cfs):	0.00
Upstream Demand (cfs):	0.00
Base Threshold (cfs):	1.46

Cauge Threshold (cfs):

22

west virginia department of environmental protection



Water Management Plan: Secondary Water Sources



WMP-01682

API/ID Number

047-017-06421

Operator:

Antero Resources

Honey Unit 2H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Lake/Reservior

Source ID:	31291	Source Name	City of Salem	Reservior (Lower D	og Run)	Source start	date:	6/14/2014	
			Public Water	Provider		Source end	date:	6/14/2015	
		Source Lat:	39.28834	Source Long:	-80.54966	County	Ha	arrison	
		Max. Daily Pu	rchase (gal)	1,000,000	Total Volu	me from Source (ga	al):	7,020,000	
	DEP Co	omments:							

WMP-01682	API/ID Number	047-017-06421	Operator:	Antero Resources	
	Hon	ey Unit 2H			
ortant:					
- 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10	source identified in you	ır water manageme	nt plan (i.e. group	ndwater well	
reach proposed secondary water					
portant: r each proposed secondary water e/reservoir, recycled frac water, allability of water. These sources	multi-site impoundment	, out-of-state source	e), DEP makes no	estimation of the	

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

ource ID:	31292	Source Name	Pennsboro Lak	e		Source start date: Source end date:	**************************************
		Source Lat:	39.281689	Source Long:	-80.925526	County	Ritchie
		Max. Daily Pu	rchase (gal)		Total Volu	me from Source (gal):	7,020,000
	DEP Co	omments:					
ource ID:	31293	Source Name	Powers Lake (V	Vilderness Water	Park Dam)	Source start date: Source end date:	5 101
		Source Lat:	39.255752	Source Long:	-80.463262	County	Harrison
		Max. Daily Pur	rchase (gal)		Total Volu	me from Source (gal):	7,020,000
	DEP Co	omments:					

WMP-01682 API/ID Number 047-017-06421 Operator: Antero Resources
Honey Unit 2H

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID:	31294	Source Name	Powers Lake T	wo		Source start date Source end date	
		Source Lat:	39.247604	Source Long:	-80.466642	County	Harrison
		Max. Daily Pu	rchase (gal)		Total Volum	me from Source (gal):	7,020,000
	DEP Co	omments:					

WMP-01682	API/ID Number	047-017-06421	Operator:	Antero Resources
	Hon	ey Unit 2H		
			Y 14	7

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

her							
Source ID:	31295 So	ource Name	Poth Lake (Lan	Source start date:	6/14/2014		
			Private Owner	r		Source end date:	6/14/201
	Se	ource Lat:	39.221306	Source Long:	-80.463028	County	Harrison
	1	Max. Daily Pur	rchase (gal)		Total Volum	me from Source (gal):	7,020,000
	DEP Comr	ments:					
	DEP Comr	ments:					
	DEP Comr	ments:					
	DEP Comr	ments:					
	DEP Comm	ments:					
	DEP Comr	ments:					
Source ID:			Williamson Po	nd (Landowner Po	and)	Source start date:	6/14/2014
Source ID:		ments:	Williamson Po	nd (Landowner Po	nd)	Source start date: Source end date:	6/14/2014 6/14/2015
Source ID:	31296 So		Williamson Po	nd (Landowner Po Source Long:	-80.886161		2000
Source ID:	31296 So	urce Name	39.19924		-80.886161	Source end date:	6/14/201

	The same of the sa		
API/ID Number	047-017-06421	Operator:	Antero Resources
Hon	ey Unit 2H		
	API/ID Number	1	API/ID Number 047-017-06421 Operator:

Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID:	31297	Source Name	Eddy Pond (La	ndowner Pond)		Source start date: Source end date:	6/14/2014 6/14/2015
		Source Lat:	39.19924	Source Long:	-80.886161	County	Ritchie
		Max. Daily Pur	rchase (gal)		Total Volur	me from Source (gal):	7,020,000
	DEP Co	omments:					
Source ID:	31298	Source Name	Hog Lick Quarr	i at		Source start date:	6/14/2014
Source ID:	31298	Source Name	Hog Lick Quarr	i at		Source start date: Source end date:	6/14/2014 6/14/2015
Source ID:	31298	Source Name Source Lat:		i at	-80.217941		
Source ID:	31298		Industrial Facil	lity		Source end date:	6/14/2015

		1-42	Contract of the Contract of th
WMP-01682	API/ID Number 047-017	7-06421 Operator:	Antero Resources
	Honey Unit 2H		


Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

ource ID:	31299	Source Name	Glade Fork Mi	-		Source start date:	W
			Industrial Fac	ility		Source end date:	6/14/2015
		Source Lat:	38.965767	Source Long:	-80.299313	County	Upshur
		Max. Daily Pur	rchase (gal)	1,000,000	Total Volu	me from Source (gal):	7,020,000
	DEP Co	omments:					

Source ID: 31300 Source Name Various Source start date: 6/14/2014 Source end date: 6/14/2015 Source Lat: Source Long: County Max. Daily Purchase (gal) Total Volume from Source (gal): 7,020,000 DEP Comments: Sources include, but are not limited to: Dufflemeyer Unit 1H

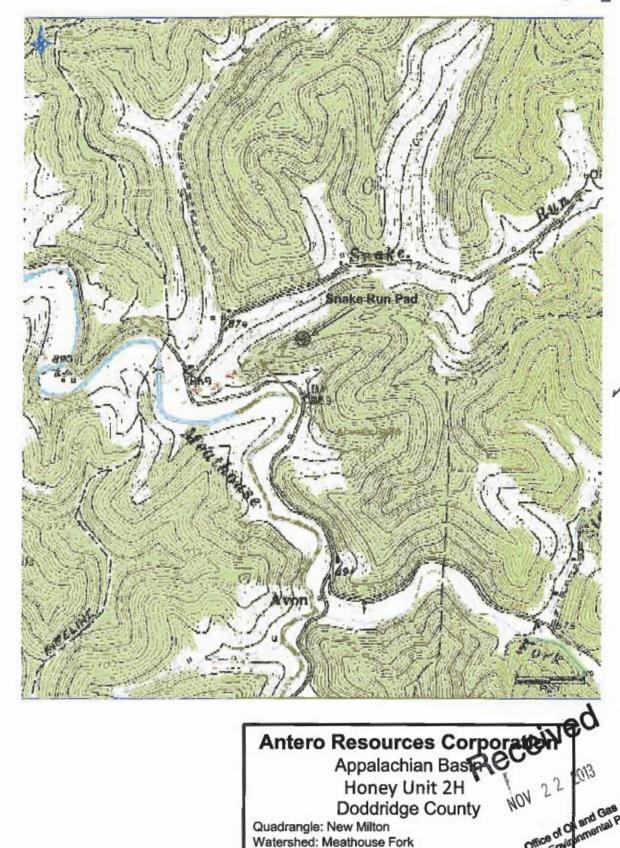

Quadrangle: New Milton Watershed: Meathouse Fork

District: New Milton Date: 11-1-2013

W Dept. of Envir

